

NATIONAL JUTE BOARD

CHENNAI REGIONAL OFFICE

Tender Notice No.: NIT-6/NJB/Partition/2016-17 Dated 31.3.2017

TENDER NOTICE FOR "NJB - Chennai - Partition & Infrastructure works' 2016-17"

Sealed Tenders are invited by the Secretary, National Jute Board (NJB) from the bonafide interior decorators of repute and with good financial standing for Aluminium Partition and other Infrastructure works at the Ground floor, South wing of "TNSCB Complex, Pillaiyar Koil Thottam, New No. 130 (Old No.212), R.K.Mutt Road, Mylapore – 600004", in a total area measuring 1,379 sq.ft. for an office area. The job involves room partition and other infrastructure facilities as per the following work description and the work has to be completed within 10 working days, immediately after allotment of Work Order.

BOQ OF INTERIOR FITOUT FOR NATIONAL JUTE BOARD OFFICE AT							
Ground floor, South wing of "TNSCB Complex, Pillaiyar Koil Thottam, New No. 130 (Old No.212), R.K.Mutt Road, Mylapore – 600004							
SLNO	DESCRIPTION OF WORK	NOS	MEASUREMENT		QUANTITY	RATE	PRICE (INR)
			LENGTH	HEIGHT			
1	Procuring and Fixing of Anodized Aluminium Box Sections in natural colour with matt finish extrudes of size 65mm x 38mm Frames with Wooden Particle Board shutters of width 8mm or 7mm upto slab or beam on the Ceiling for partitions. All Top, Bottom and Mid Frames to be of same 65mm x 35mm box width fixed with Wall plugs and screws or with fixing clips or with expansion fold fasteners including necessary filling up of gaps at junctions, at top, bottom and sides with required PVC/Neoprene felt etc. Aluminium sections shall be smooth, rust free, straight and jointed mechanically wherever required including cleat angle, aluminium snap beading for glazing/paneling, CP brass/ S.Steel screws, inclusive of all patch fittings all complete as per architectural drawings						
	South wall of Records Room	1	9'-1"	8'-6"	77.35		-
	South wall of Records Room	1	3'-3"	2'-0"	6.5		-
	North wall of MPO Cabin	1	11'-4½"	9'-6"	108		-
	East wall of MPO Cabin	1	3'-3"	2'-6"	8.12		-

2	<p>Procuring and Fixing of Anodized Aluminium Box Sections in natural colour with matt finish extrudes of size 65mm x 38mm Frames with Wooden Particle Board shutters of width 7mm or 8mm upto 1200 mm from ground for partitions. All Top, Bottom and Mid Frames to be of same 65mm x 35mm box width with), fixed with Wall plugs and screws or with fixing clips or with expansion fold fasteners including necessary filling up of gaps at junctions, at top, bottom and sides with required PVC/Neoprene felt etc. Aluminium sections shall be smooth, rust free, straight and jointed mechanically wherever required including cleat angle, aluminium snap beading for glazing/paneling, CP brass/ S.Steel screws, inclusive of all patch fittings all complete as per architectural drawings</p>					
	South wall of Rest Room		9'-1"	4'-0"	36.4	-
	South wall of Cabin 1		9'-1"	4'-0"	36.4	-
	South wall of Cabin 2		9'-1"	4'-0"	36.4	-
	West wall of Rest Room		7'-0"	4'-0"	28	-
	West wall of Cabin 1		9'-0"	4'-0"	36	-
	West wall of Cabin 2		5'-8"	4'-0"	22.8	-
3	<p>Procuring and Fixing of Anodized Aluminium Box Sections in natural colour with matt finish extrudes of size 65mm x 38mm Frames with Wooden Particle Board shutters of width 7mm or 8mm from 1000mm from ground and rest to be done with one way mirror 4mm or 5mm THK for partitions. All Top, Bottom and Mid Frames to be of same 65mm x 35mm box width fixed with Wall plugs and screws or with fixing clips or with expansion fold fasteners including necessary filling up of gaps at junctions, at top, bottom and sides with required PVC/Neoprene felt etc. Aluminium sections shall be smooth, rust free, straight and jointed mechanically wherever required including cleat angle, aluminium snap beading for glazing/paneling, CP brass/ S.Steel screws, inclusive of all patch fittings all complete as per architectural drawings</p>					
	East wall for MPO Cabin		7'-4"	9'-6"	69.35	-

	East wall for MPO Cabin		11'-8"	9'-6"	112.32		-
4	Procuring and Fixing of Anodized Aluminium Box Sections in natural colour with matt finish extrudes of size 65mm x 38mm Frames with Wooden Particle Board shutters of width 8mm or 7mm upto 2100mm height for Door opening. All Top, Bottom and Mid Frames to be of same 65mm x 35mm box width fixed with Wall plugs and screws or with fixing clips or with expansion fold fasteners including necessary filling up of gaps at junctions, at top, bottom and sides with required PVC/Neoprene felt etc. Aluminium sections shall be smooth, rust free, straight and jointed mechanically wherever required including cleat angle, aluminium snap beading for glazing/paneling, CP brass/ S.Steel screws, inclusive of all patch fittings all complete as per architectural drawings.						
	Door for Records Room & MPO Cabin	2	3'-3"	7'-0"	45.5		
5	Providing electrification arrangements including AC Fixing wiring, A.C Points, (for around 5 Nos.) & UPS Wiring, MCB board, Etc,	LUMPSUM					
TOTAL (INR)							-

The whole job is to be executed as a 'TURNKEY PACKAGE' and final payment will be made only after the satisfactory completion of the event.


The charges quoted should include the taxes and duties and Service Tax, applicable, respectively. Details of Previous Experience are to be enclosed, suitably. **Income tax (TDS) will be deducted at the time of making the payment at the applicable rates.**

Payment will be made only through Bank (NEFT) after satisfactory completion of the work.

Sealed tenders, for the above job, complete in all respects superscribing the envelope "**NJB - Chennai - Partition & Infrastructure works' 2017**" and addressed to **'The Secretary, National Jute Board, No. 130, (Old No.212), R.K.Mutt Road, Mylapore, Chennai 600 004'** should reach not later than 13.00 hrs on **17th Apr'17**. Tenders will be opened on the same day at 15.00 hrs. in the presence of tenderers.

No responsibility is accepted for postal delays.

The NJB reserves the right to accept or reject any offer in full or in part or all the tenders without assigning any reason/s, whatsoever.

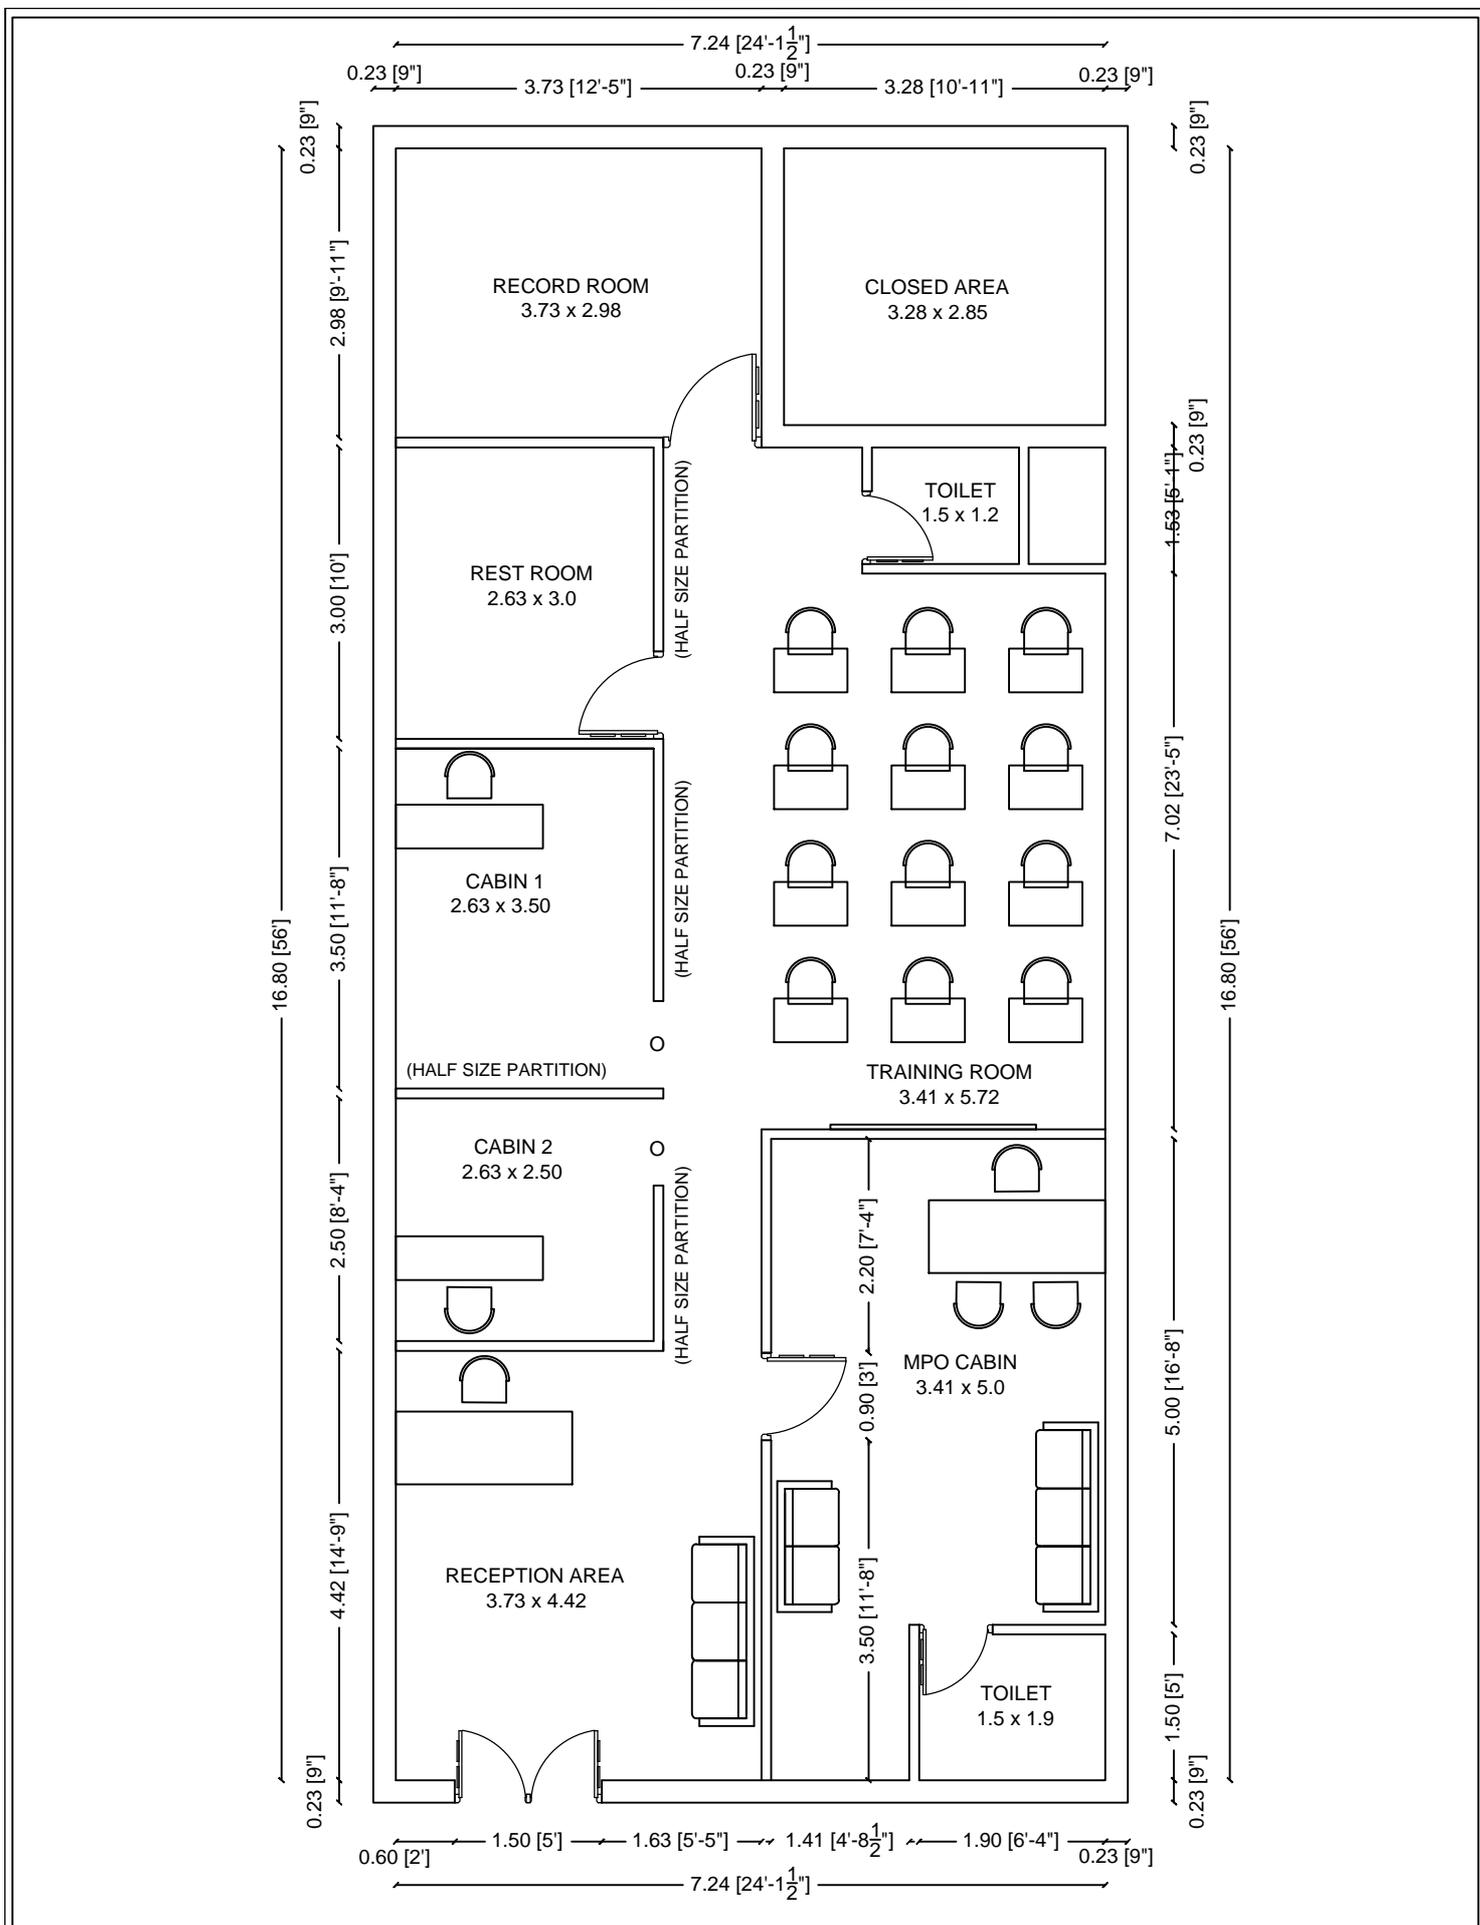

INTERIOR FITOUT FOR JUTE NATIONAL BOARD		DRAWING TITLE	NOTE	PHOENIX DESIGN STUDIOS
DATE : 06/03/17		FLOOR PLAN	1. ALL DIMENSIONS ARE IN METERS. 2. THERE MIGHT BE MINUTE DISCREPANCY IN THE ASBUILT DRAWING AS THE DESIGN AS PER THE BUILDING OWNER'S FLOOR PLAN.	ARCHITECTS, PLANNERS & INTERIOR DESIGNERS
FLOOR PLAN				48, P.S.SIVASAMY SALAI 2ND STREET, MYLAPORE, CHENNAI-600004.
SHEET NUM : 1	REVISION NUM : R4			TEL: 044-42124490 E-MAIL: design@phoenixstudios.in